



Euro Profile Double Cylinder

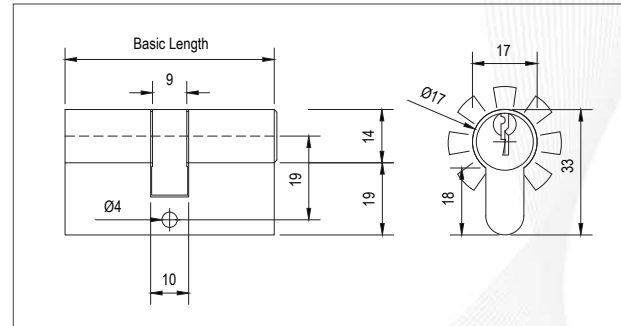

Features

EURO PROFILE DOUBLE CYLINDER 3520.SMX

- Cylinder According to German Standard DIN 18252/EN 1303
- Basic Length 60 mm, extension in 4, 5, 6mm increments, core pins are of special wear resistant bronze.
- Six-pins tumblers for more security. Cylinders come with 3 keys.
- Anti-drilling/anti-pulling protection available.
- Suitable for GMK system.
- Offset cylinder can be supplied on special request.
- 60000 different key changes possible.
- Packed with M5 screw.

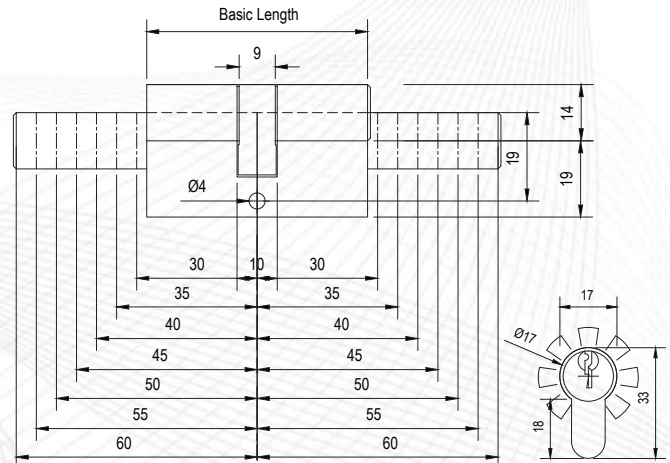

EURO PROFILE DOUBLE CYLINDER 1910

- According to German Standard DIN 18252/EN 1303.
- Basic length 60 mm, extension in 4,5,6 mm increments.
- 5 pin tumblers each side.
- 3 keys of brass or satin nickel plated.
- Offset cylinder can be supplied on special request.
- Packed with M5 screw.

Item Code	Overall Cylinder Length Cam (mm)	Keyside to center of Cam (mm)	Center of Cam to Keyside (mm)
3520.SMX	60	30	30
	65	32.5	32.5
	70	35	35
	76	38	38
	80	40	40
	90	45	45
Offset Sizes	80	50	30
	100	60	40
	120	35	85

Item Code	Overall Cylinder Length Cam (mm)	Keyside to center of Cam (mm)	Center of Cam to Keyside (mm)
1910	60	30	30
	65	32.5	32.5
	70	35	35
	76	38	38
	80	40	40
	90	45	45
Offset Sizes	80	50	30
	100	60	40
	120	35	85